




GENERAL APPLICATION NOTE

SD Series Typical Modbus RS485 Connections

Created: A J Buckley
Position: Engineering Manager
Date: 06/04/08

Reviewed: M Duncan
Position: Sales & Marketing Director
Date: 08/04/08

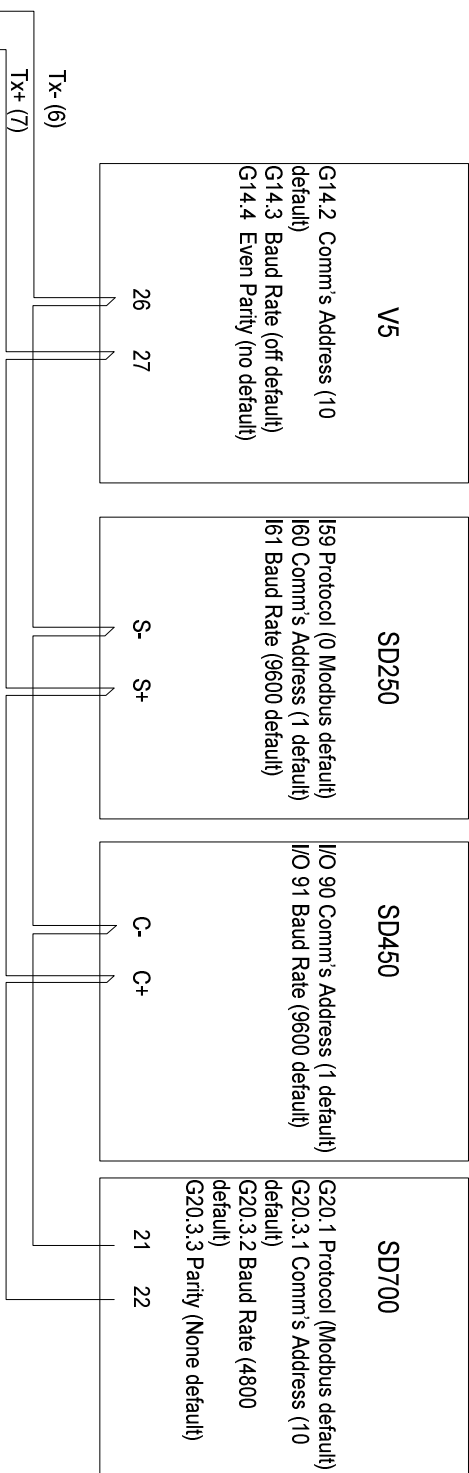

Typical Communications Port
 Setup -
 Baud Rate 9600
 Parity None

All devices on network require a unique Comm's (Slave) address and should be set to the same Baud rate and Parity

Rev A		SD SERIES TYPICAL RS485 MODBUS CONNECTIONS			
		SIZE	FSCM NO	DWG NO	REV
				MB01	A
SCALE	1:1	SHEET	1 OF 1		